Capacity:
150 *Te* (metric) per Anchor

Total weight:
appr. 3140 *kg* (per set as drawn)

Max. travelling speed:
appr. 900 *mm/min* @ 1450 *RPM* (50 Hz)

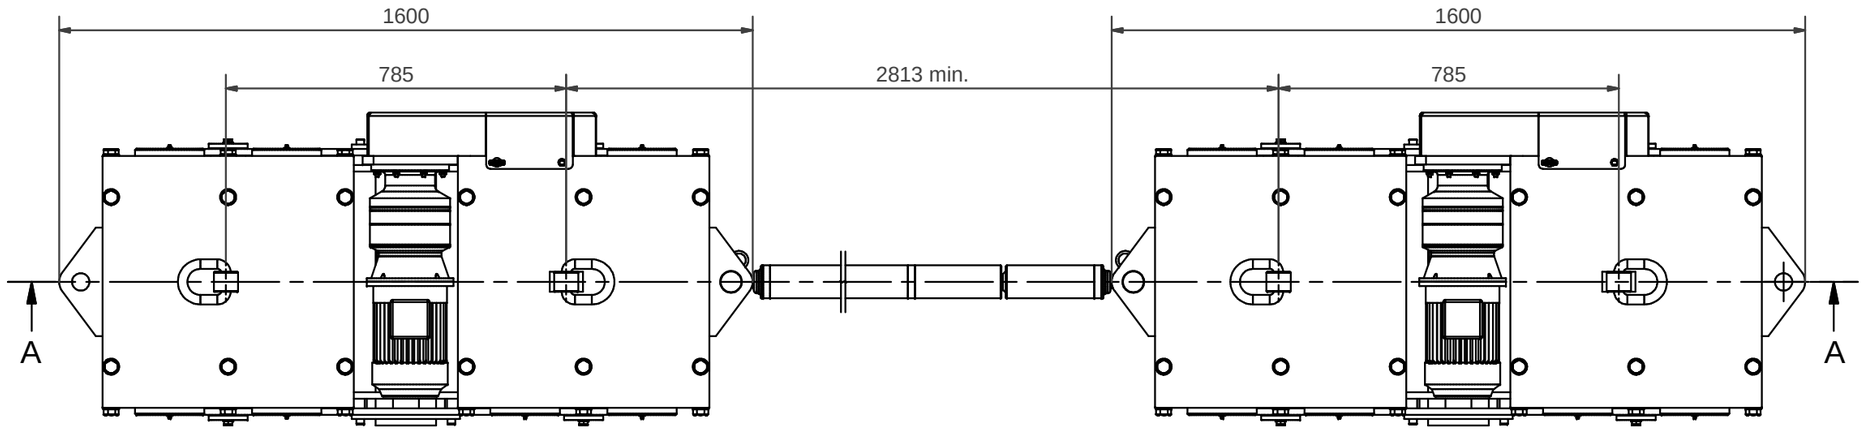

A-A

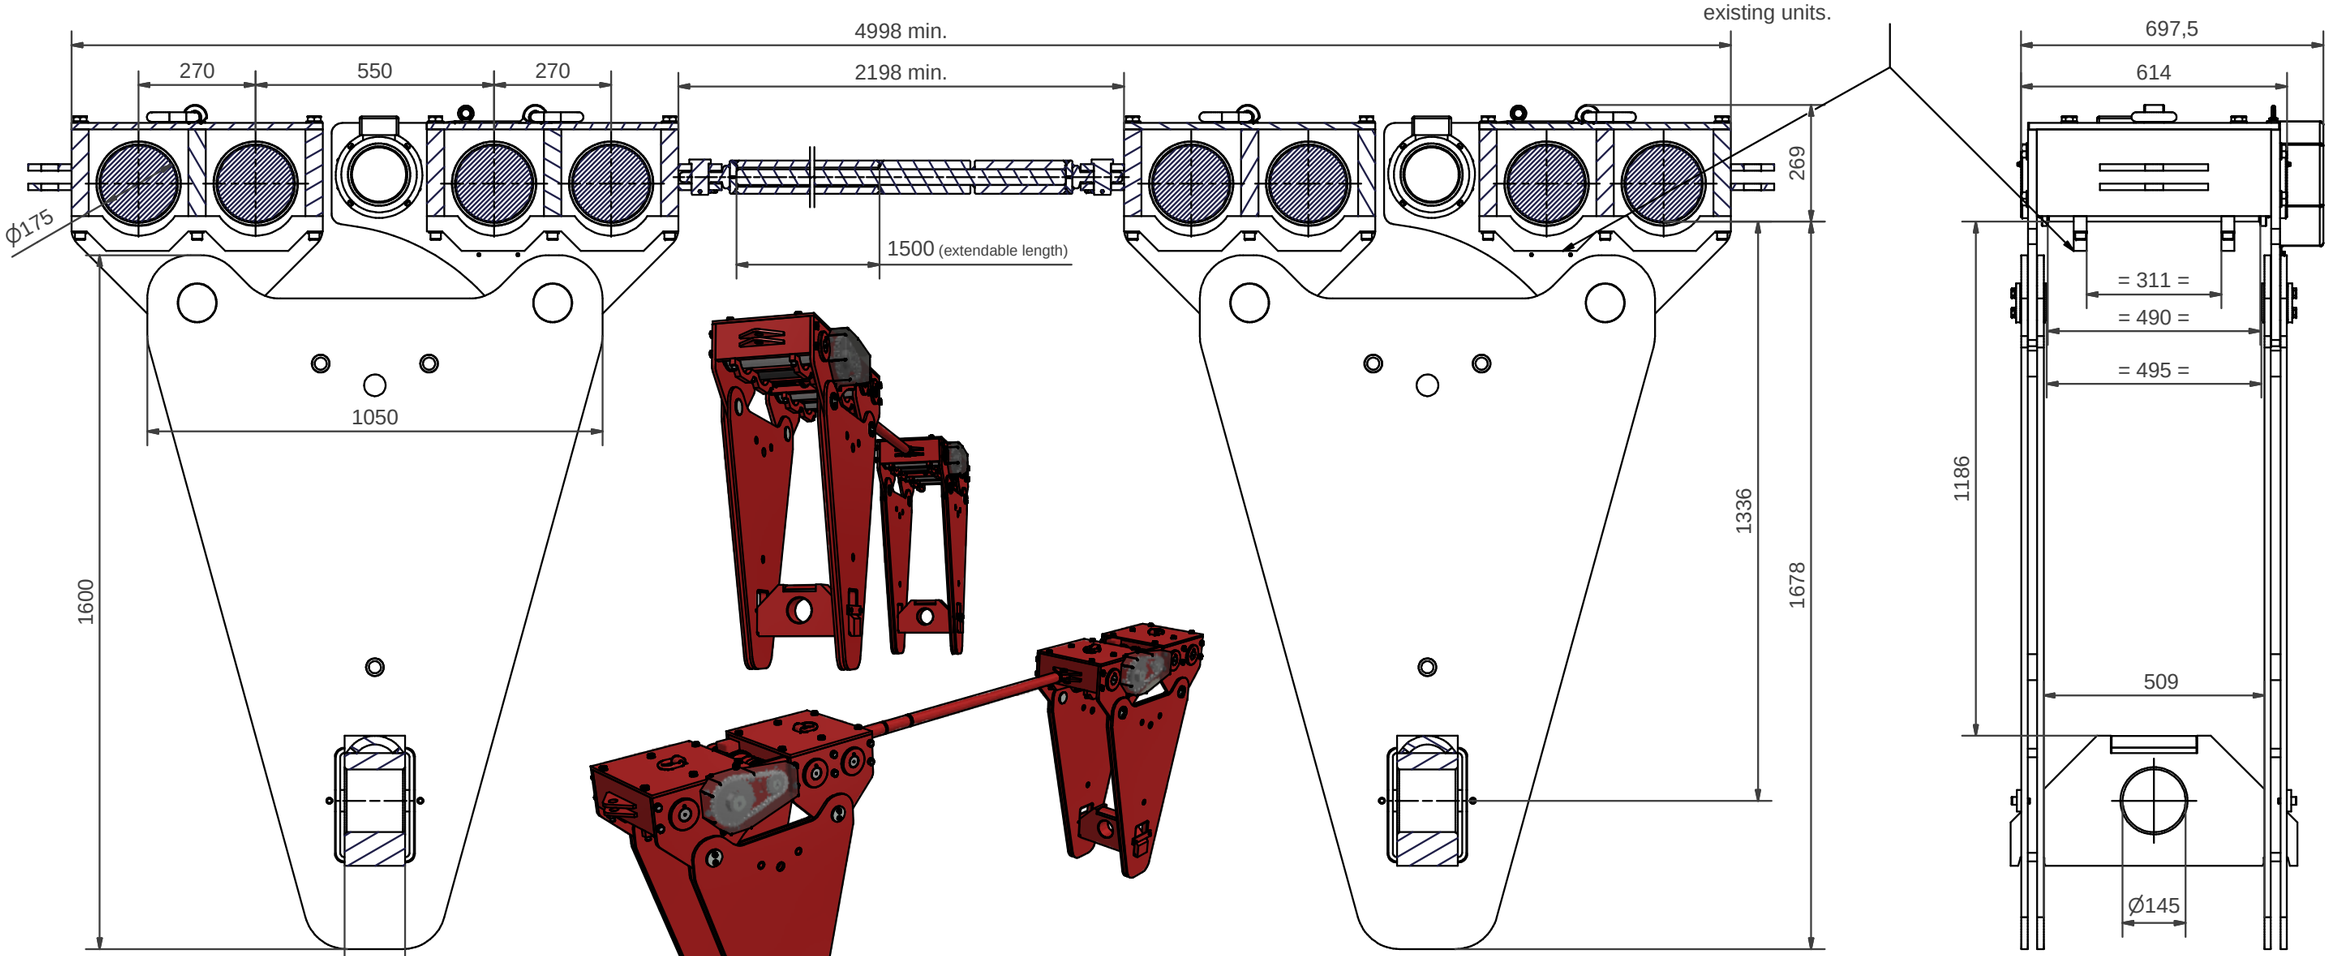

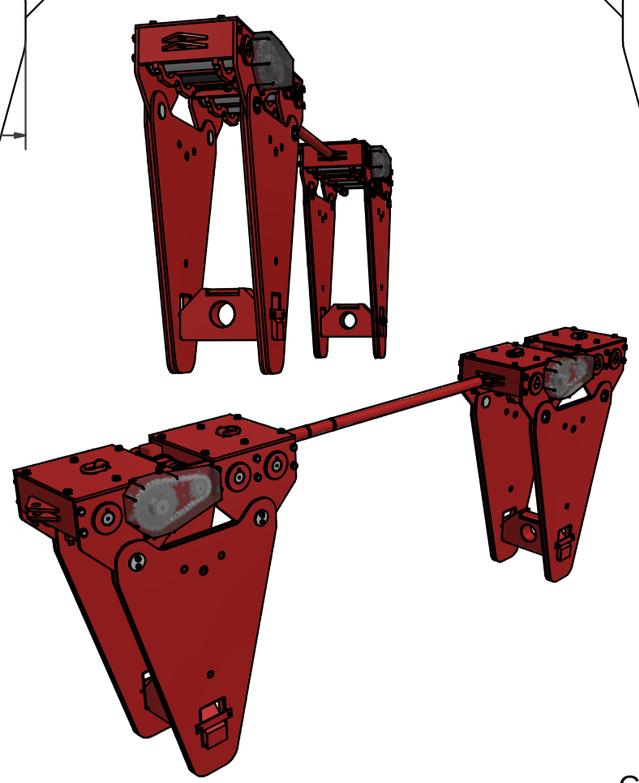

Capacity: 1500 kN (per anchor)

DRAWN BY: C.K.	APPROVED BY:	MASS: 3140 kg	MATERIAL CERTIFICATE:	DATE: 10-8-2007	REMOVE BURS OF INTERSECTING HOLES. BREAK SHARP EDGES 0.1-0.3x45°	TOLERANCE UNLESS OTHERWISE STATED; ANGLE: ±0.5° LINEAR: ±0.5
CHECKED BY:	SCALE: 1 : 10	MATERIAL:				

OPAALSTRAAT 44, 7554 TS HENGELO HOLLAND
PO BOX 421, 7550 AK HENGELO HOLLAND
TELEPHONE (+31) 74-2422045
FACSMILE (+31) 74-2430338

ENERPAC

© COPYRIGHTS RESERVED

ROUGHNESS OVERALL: 3.2

PART NAME: Beam Skidding Unit 150 Te (each)

DRAW. NO: 02907.01.00.00

REV.:

FORM: A2